


## Kurzschenkelige Fittings

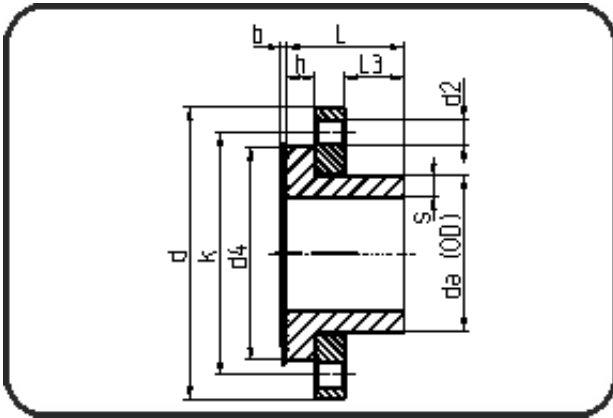

Code: 292.0

- Hochdruckflansch DIN PN25
- inkl. Dichtung + Losflansch und Zentrierring
- gebohrt PN25
- **Stumpfschweissung**
- **PE 100-RC schwarz**

Dimension	Code	Detail	Gewicht
500	70.292.0500.07	500X68,3 SDR7,4 ISO S-3,2	121.00

	Einheit	Nominale	Tol+	Tol-
da(OD)	mm	500	4.50	0.00
L	mm	245	0.00	0.00
L3	mm	101	0.00	0.00
b	mm	6	0.00	0.00
s	mm	68,3	4.60	0.00
d	mm	730	0.00	0.00
d2	mm	36	0.00	0.00
h	mm	86	0.00	0.00
d4	mm	619	0.00	0.00
k	mm	660	0.00	0.00