


Rohrbögen

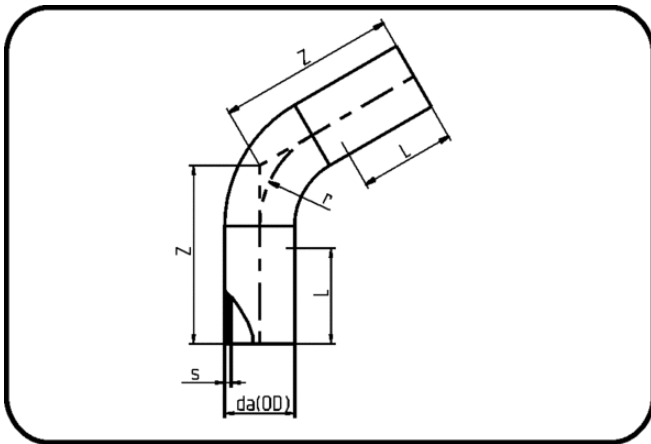

Code: 398

- Rohrbogen 60°
- Radius 1,5 x da
- aus Rohr geformt
- **Stumpf + E-Muffenschweissung**
- **PE 100-RC schwarz**

** Auf Anfrage.

Dimension	Code	Detail	da(OD) mm	s mm	z mm	r mm	L mm	Gewicht
90	70.398.0090.09	90 SDR9 ISO S-4 20 bar	90	10,1	250	135	150	1.54
110	70.398.0110.09	110 SDR9 ISO S-4 20 bar	110	12,3	280	165	150	2.48
125	70.398.0125.09	125 SDR9 ISO S-4 20 bar	125	14	290	188	150	3.46
140	70.398.0140.09	140 SDR9 ISO S-4 20 bar	140	15,7	350	210	150	5.54
160	70.398.0160.09	160 SDR9 ISO S-4 20 bar	160	17,9	380	240	150	6.86
180	70.398.0180.09	180 SDR9 ISO S-4 20 bar	180	20,1	430	270	150	10.21
200	70.398.0200.09	200 SDR9 ISO S-4 20 bar	200	22,4	450	300	150	12.22
225	70.398.0225.09	225 SDR9 ISO S-4 20 bar	225	25,2	470	338	150	16.61
250	70.398.0250.09	250 SDR9 ISO S-4 20 bar	250	27,9	570	375	250	27.38
280	70.398.0280.09	280 SDR9 ISO S-4 20 bar	280	31,3	580	420	250	34.44
315	70.398.0315.09	315 SDR9 ISO S-4 20 bar	315	35,2	680	496	300	52.84
355	70.398.0355.09	355 SDR9 ISO S-4 20 bar	355	39,7	760	560	300	71.00
400	70.398.0400.09	400 SDR9 ISO S-4 20 bar	400	44,7	780	637	300	100.15
450	70.398.0450.09	450 SDR9 ISO S-4 20 bar	450	50,3	820	711	300	141.10
500	70.398.0500.09	500 SDR9 ISO S-4 20 bar	500	55,8	960	783	350	203.39
560	70.398.0560.09	560 SDR9 ISO S-4 20 bar	560	62,5	980	877	350	175.00
630	70.398.0630.09	630 SDR9 ISO S-4 20 bar	630	70,3	1.200	955	350	270.00