


## Kurzschenkelige Fittings

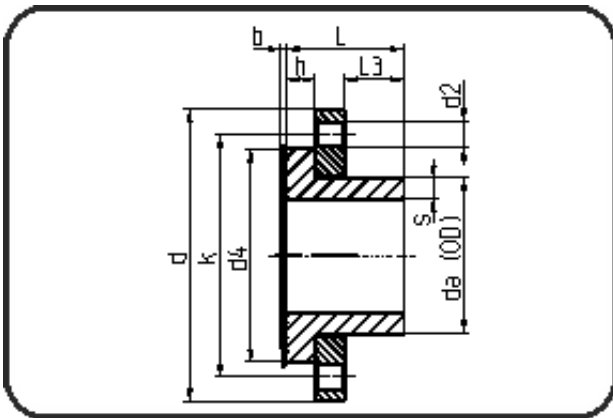

Code: 294.0

- Hochdruckflansch ANSI PN25
- inkl. Dichtung + Losflansch und Zentrierring
- gebohrt ANSI CL150
- **Stumpfschweissung**
- **PE 100-RC schwarz**

Dimension	Code	Detail	Gewicht
250	70.294.0250.07	250X34,2 SDR7,4 ISO S-3,2	21.05

	Einheit	Nominale	Tol+	Tol-
da(OD)	mm	250	2.30	0.00
L	mm	140	0.00	0.00
L3	mm	61,4	0.00	0.00
b	mm	6	0.00	0.00
s	mm	34,8	3.60	0.00
d	mm	405	0.00	0.00
d2	mm	25,5	0.00	0.00
h	mm	50	0.00	0.00
d4	mm	337	0.00	0.00
k	mm	362	0.00	0.00