


Segmentierte Fittings

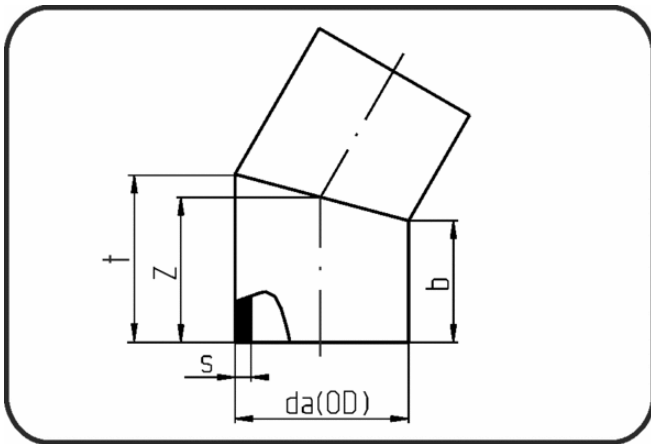

Code: 329

- **Bogen 30°**
- segmentiert
- Abminderungsfaktor 0,8
- **Stumpfschweissung**
- **PE 100-RC schwarz**

Ab Dim. 800 Verfügbarkeit + Lieferzeit auf Anfrage.

Dimension	Code	Detail	da(OD) mm	s mm	b mm	z mm	Gewicht
560	70.329.0560.41	560X13,7 SDR41 ISO S-20	560	13,7	350	425	20.30
630	70.329.0630.41	630X15,4 SDR41 ISO S-20	630	15,4	350	434	25.60
710	70.329.0710.41	710X17,4 SDR41 ISO S-20	710	17,4	400	495	37.90
800	70.329.0800.41	800X19,6 SDR41 ISO S-20	800	19,6	400	507	59.10
900	70.329.0900.41	900X22,0 SDR41 ISO S-20	900	22	400	521	76.10
1000	70.329.1000.41	1000X24,5 SDR41 ISO S-20	1.000	24,5	500	634	96.00
1200	70.329.1200.41	1200X29,4 SDR41 ISO S-20	1.200	29,4	500	661	144.00
560	70.329.0560.33	560X17,2 SDR33 ISO S-16	560	17,2	350	425	24.70
630	70.329.0630.33	630X19,3 SDR33 ISO S-16	630	19,3	350	434	31.80
710	70.329.0710.33	710X21,8 SDR33 ISO S-16	710	21,8	400	495	47.20
800	70.329.0800.33	800X24,5 SDR33 ISO S-16	800	24,5	400	507	73.30
900	70.329.0900.33	900X27,6 SDR33 ISO S-16	900	27,6	400	521	95.00
1000	70.329.1000.33	1000X30,6 SDR33 ISO S-16	1.000	30,6	500	634	119.00
1200	70.329.1200.33	1200X36,7 SDR33 ISO S-16	1.200	36,7	500	661	178.00
560	70.329.0560.26	560X21,4 SDR26 ISO S-12,5	560	21,4	350	425	30.40
630	70.329.0630.26	630X24,1 SDR26 ISO S-12,5	630	24,1	350	434	39.40
710	70.329.0710.26	710X27,2 SDR26 ISO S-12,5	710	27,2	400	495	58.40
800	70.329.0800.26	800X30,6 SDR26 ISO S-12,5	800	30,6	400	507	90.70
900	70.329.0900.26	900X34,4 SDR26 ISO S-12,5	900	34,4	400	521	98.30
1000	70.329.1000.26	1000X38,2 SDR26 ISO S-12,5	1.000	38,2	500	634	148.00
1200	70.329.1200.26	1200X45,9 SDR26 ISO S-12,5	1.200	45,9	500	661	222.00
560	70.329.0560.17	560X33,2 SDR17 ISO S-8	560	33,2	350	425	46.00
630	70.329.0630.17	630X37,4 SDR17 ISO S-8	630	37,4	350	434	59.60
710	70.329.0710.17	710X42,1 SDR17 ISO S-8	710	42,1	400	495	88.10
800	70.329.0800.17	800X47,4 SDR17 ISO S-8	800	47,4	400	507	115.00

Dimension	Code	Detail	da(OD) mm	s mm	b mm	z mm	Gewicht
900	70.329.0900.17	900X53,3 SDR17 ISO S-8	900	53,3	400	521	177.00
1000	70.329.1000.17	1000X59,3 SDR17 ISO S-8	1.000	59,3	500	634	223.00
1200	70.329.1200.17	1200X71,1 SDR17 ISO S-8	1.200	71,1	500	661	336.00
560	70.329.0560.11	560X50,8 SDR11 ISO S-5	560	50,8	350	425	67.80
630	70.329.0630.11	630X57,2 SDR11 ISO S-5	630	57,2	350	434	87.40
710	70.329.0710.11	710X64,5 SDR11 ISO S-5	710	64,5	400	495	130.00
800	70.329.0800.11	800X72,6 SDR11 ISO S-5	800	72,6	400	507	203.00
900	70.329.0900.11	900X81,7 SDR11 ISO S-5	900	81,7	400	521	262.00
1000	70.329.1000.11	1000X90,8 SDR11 ISO S-5	1.000	90,8	500	634	330.00
1200	70.329.1200.11	1200X108,9 SDR11 ISO S-5	1.200	108,9	500	661	496.00