


## Rohrbögen

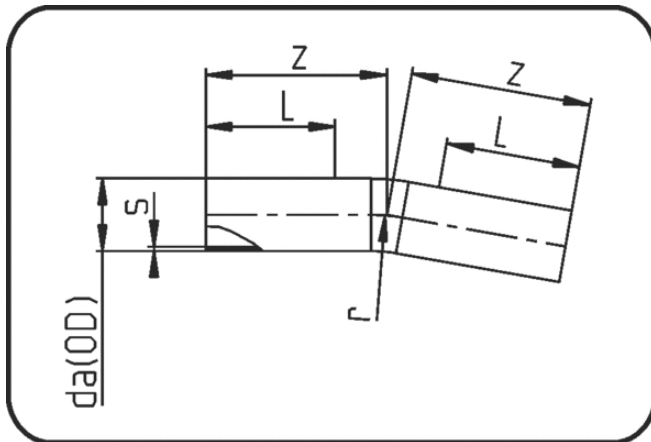

Code: 394

- Rohrbogen 11°
- Radius 1,5 x da
- aus Rohr geformt
- **Stumpf + E-Muffenschweissung**
- **PE 100-RC schwarz**

Dimension	Code	Detail	da(OD) mm	s mm	z mm	r mm	L mm	Gewicht
90	70.394.0090.11	90 SDR11 ISO S-5 16 bar	90	8,2	350	135	150	1.42
110	70.394.0110.11	110 SDR11 ISO S-5 16 bar	110	10	330	165	150	2.14
125	70.394.0125.11	125 SDR11 ISO S-5 16 bar	125	11,4	380	188	150	3.38
140	70.394.0140.11	140 SDR11 ISO S-5 16 bar	140	12,7	395	210	150	3.96
160	70.394.0160.11	160 SDR11 ISO S-5 16 bar	160	14,6	415	480	150	5.54
180	70.394.0180.11	180 SDR11 ISO S-5 16 bar	180	16,4	450	270	150	7.49
200	70.394.0200.11	200 SDR11 ISO S-5 16 bar	200	18,2	480	300	150	9.88
225	70.394.0225.11	225 SDR11 ISO S-5 16 bar	225	20,5	510	338	150	13.36
250	70.394.0250.11	250 SDR11 ISO S-5 16 bar	250	22,7	540	375	250	17.66
280	70.394.0280.11	280 SDR11 ISO S-5 16 bar	280	25,4	550	420	300	22.20
315	70.394.0315.11	315 SDR11 ISO S-5 16 bar	315	28,6	700	473	450	36.30
355	70.394.0355.11	355 SDR11 ISO S-5 16 bar	355	32,2	700	533	450	46.00
400	70.394.0400.11	400 SDR11 ISO S-5 16 bar	400	36,3	850	600	550	70.90
450	70.394.0450.11	450 SDR11 ISO S-5 16 bar	450	40,9	900	675	550	95.00
500	70.394.0500.11	500 SDR11 ISO S-5 16 bar	500	45,4	1.000	750	600	130.00
560	70.394.0560.11	560 SDR11 ISO S-5 16 bar	560	50,8	1.050	840	650	172.00
630	70.394.0630.11	630 SDR11 ISO S-5 16 bar	630	57,2	1.250	945	750	258.00