


Rohrbögen

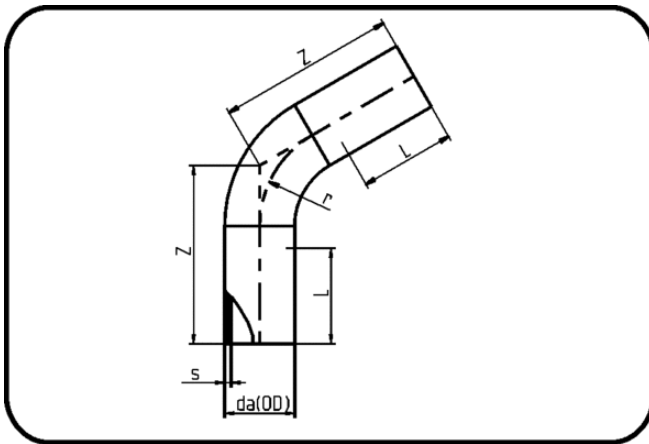

Code: 398

- Rohrbogen 60°
- Radius 1,5 x da
- aus Rohr geformt
- **Stumpf + E-Muffenschweissung**
- **PE 100-RC schwarz**

Dimension	Code	Detail	da(OD) mm	s mm	z mm	r mm	L mm	Gewicht
90	70.398.0090.11	90 SDR11 ISO S-5 16 bar	90	8,2	350	135	260	1.28
110	70.398.0110.11	110 SDR11 ISO S-5 16 bar	110	10	340	165	240	2.07
125	70.398.0125.11	125 SDR11 ISO S-5 16 bar	125	11,4	390	188	280	2.88
140	70.398.0140.11	140 SDR11 ISO S-5 16 bar	140	12,7	400	210	280	4.62
160	70.398.0160.11	160 SDR11 ISO S-5 16 bar	160	14,6	430	240	290	5.72
180	70.398.0180.11	180 SDR11 ISO S-5 16 bar	180	16,4	460	270	300	8.51
200	70.398.0200.11	200 SDR11 ISO S-5 16 bar	200	18,2	490	300	320	10.19
225	70.398.0225.11	225 SDR11 ISO S-5 16 bar	225	20,5	530	338	330	13.85
250	70.398.0250.11	250 SDR11 ISO S-5 16 bar	250	22,7	700	375	330	22.82
280	70.398.0280.11	280 SDR11 ISO S-5 16 bar	280	25,4	720	420	250	28.70
315	70.398.0315.11	315 SDR11 ISO S-5 16 bar	315	28,6	720	473	250	44.03
355	70.398.0355.11	355 SDR11 ISO S-5 16 bar	355	32,2	730	533	400	46.00
400	70.398.0400.11	400 SDR11 ISO S-5 16 bar	400	36,3	780	637	300	65.00
450	70.398.0450.11	450 SDR11 ISO S-5 16 bar	450	40,9	820	711	300	87.00
500	70.398.0500.11	500 SDR11 ISO S-5 16 bar	500	45,4	960	783	350	125.00
560	70.398.0560.11	560 SDR11 ISO S-5 16 bar	560	50,8	980	877	350	160.00
630	70.398.0630.11	630 SDR11 ISO S-5 16 bar	630	57,2	1.200	955	350	247.00