


Fittings with short Spigot

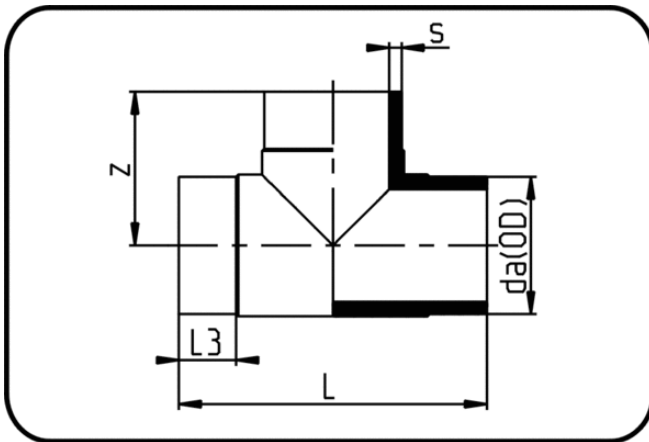

Code: 006

- Tee
- short spigot
- electrically conductive
- injection moulded
- **Butt-welding**
- **PE 100-el black**

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L mm	L3 mm	Weight
110	28.006.0110.17	110X6,6 SDR17 ISO S-8	110	6,6	121	251	50,5	1.04
125	28.006.0125.17	125X7,4 SDR17 ISO S-8	125	7,4	135	270	52	1.51
160	28.006.0160.17	160X9,5 SDR17 ISO S-8	160	9,5	170	340	57	2.90
180	28.006.0180.17	180X10,7 SDR17 ISO S-8	180	10,7	182,5	365	57	3.62
200	28.006.0200.17	200X11,9 SDR17 ISO S-8	200	11,9	200	400	57	5.24
225	28.006.0225.17	225X13,4 SDR17 ISO S-8	225	13,4	220	440	57	6.86
250	28.006.0250.17	250X14,8 SDR17 ISO S-8	250	14,8	235	464	70	9.46
315	28.006.0315.17	315X18,7 SDR17 ISO S-8	315	18,7	275	550	80	15.02
32	28.006.0032.11	32X3,0 SDR11 ISO S-5	32	3	45	90	20,5	0.04
40	28.006.0040.11	40X3,7 SDR11 ISO S-5	40	3,7	50	100	20,5	0.07
50	28.006.0050.11	50X4,6 SDR11 ISO S-5	50	4,6	60	120	23	0.14
63	28.006.0063.11	63X5,8 SDR11 ISO S-5	63	5,8	72	142	25	0.26
75	28.006.0075.11	75X6,8 SDR11 ISO S-5	75	6,8	75	152	15	0.43
90	28.006.0090.11	90X8,2 SDR11 ISO S-5	90	8,2	105	212	38	0.76
110	28.006.0110.11	110X10,0 SDR11 ISO S-5	110	10	122	253	51	1.38
125	28.006.0125.11	125X11,4 SDR11 ISO S-5	125	11,4	140	277	52	2.06
160	28.006.0160.11	160X14,6 SDR11 ISO S-5	160	14,6	170	340	57	3.78
180	28.006.0180.11	180X16,4 SDR11 ISO S-5	180	16,4	182,5	365	57	5.20
200	28.006.0200.11	200X18,2 SDR11 ISO S-5	200	18,2	200	400	57	6.92
225	28.006.0225.11	225X20,5 SDR11 ISO S-5	225	20,5	220	440	57	9.20
250	28.006.0250.11	250X22,7 SDR11 ISO S-5	250	22,7	235	466	72	12.80
315	28.006.0315.11	315X28,6 SDR11 ISO S-5	315	28,6	275	540	80	21.20