


Segmented Fittings

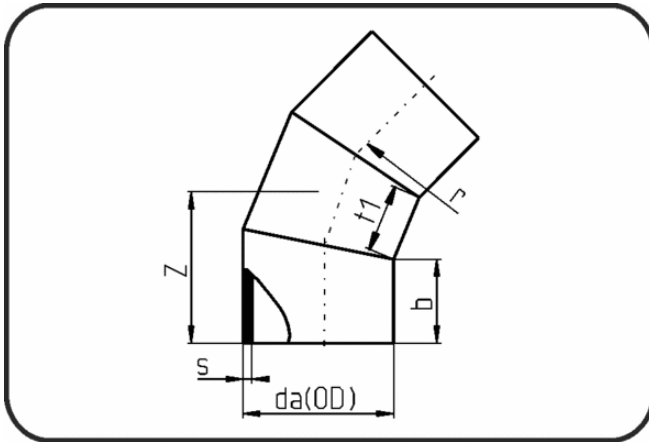

Code: 330

- Bend 45°
- segmented/inside bead removed
- derating factor 0.8
- **Butt-welding**
- **PPH grey**

Dimension	Code	Detail	da(OD) mm	s mm	r mm	b mm	t1 mm	z mm	Weight
560	12.330.0560.41	560X13,7 SDR41 ISO S-20	560	13,7	883	350	223	587	26.40
630	12.330.0630.41	630X15,4 SDR41 ISO S-20	630	15,4	918	350	251	616	34.90
710	12.330.0710.41	710X17,4 SDR41 ISO S-20	710	17,4	1.110	400	282,5	700	49.60
800	12.330.0800.41	800X19,6 SDR41 ISO S-20	800	19,6	1.155	400	318	738	66.20
900	12.330.0900.41	900X22,0 SDR41 ISO S-20	900	22	1.330	400	358	780	88.20
1000	12.330.1000.41	1000X24,5 SDR41 ISO S-20	1.000	24,5	1.380	500	398	923	129.00
1200	12.330.1200.41	1200X29,4 SDR41 ISO S-20	1.200	29,4	1.480	500	477,5	1.007	203.00
560	12.330.0560.33	560X17,2 SDR33 ISO S-16	560	17,2	883	350	223	587	32.80
630	12.330.0630.33	630X19,3 SDR33 ISO S-16	630	19,3	918	350	251	616	43.40
710	12.330.0710.33	710X21,8 SDR33 ISO S-16	710	21,8	1.110	400	282,5	700	61.70
800	12.330.0800.33	800X24,5 SDR33 ISO S-16	800	24,5	1.155	400	318	738	82.20
900	12.330.0900.33	900X27,6 SDR33 ISO S-16	900	27,6	1.330	400	358	780	110.00
1000	12.330.1000.33	1000X30,6 SDR33 ISO S-16	1.000	30,6	1.380	500	398	923	160.00
1200	12.330.1200.33	1200X36,7 SDR33 ISO S-16	1.200	36,7	1.800	500	477,5	1.007	251.00
560	12.330.0560.26	560X21,4 SDR26 ISO S-12,5	560	21,4	883	350	223	587	40.40
630	12.330.0630.26	630X24,1 SDR26 ISO S-12,5	630	24,1	918	350	251	616	53.70
710	12.330.0710.26	710X27,2 SDR26 ISO S-12,5	710	27,2	1.110	400	283	700	76.20
800	12.330.0800.26	800X30,6 SDR26 ISO S-12,5	800	30,6	1.155	400	318	738	102.00
900	12.330.0900.26	900X34,4 SDR26 ISO S-12,5	900	34,4	1.330	400	358	780	136.00
560	12.330.0560.17	560X31,7 SDR17,6 ISO S-8,3	560	31,7	883	350	223	587	58.80
630	12.330.0630.17	630X35,7 SDR17,6 ISO S-8,3	630	35,7	918	350	251	616	76.50
710	12.330.0710.17	710X40,2 SDR17,6 ISO S-8,3	710	40,2	1.110	400	283	700	110.00
800	12.330.0800.17	800X45,3 SDR17,6 ISO S-8,3	800	47,4	1.200	400	318	738	148.00