


Elongated Fittings

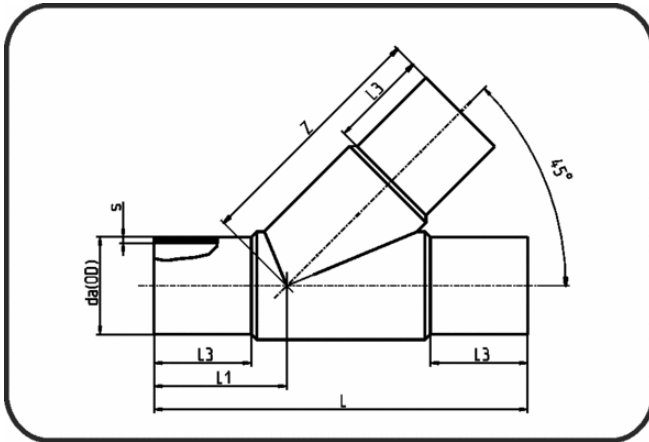

Code: 036

- Tee 45°
- long spigot
- injection moulded
- **Butt + E-socket-welding**
- PPR grey

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L mm	L3 mm	L1 mm	Weight
63	11.036.0063.17	63X3,8 SDR17 ISO S-8	63	3,8	170	262	64	93	0.39
75	11.036.0075.17	75X4,5 SDR17 ISO S-8	75	4,5	192	294	71	103	0.60
90	11.036.0090.17	90X5,4 SDR17 ISO S-8	90	5,4	230	351	80	122	1.01
110	11.036.0110.17	110X6,6 SDR17 ISO S-8	110	6,6	250,5	385	84	131	1.54
125	11.036.0125.17	125X7,4 SDR17 ISO S-8	125	7,4	292,5	431	89	140	2.35
140	11.036.0140.17	140X8,3 SDR17 ISO S-8	140	8,3	315,5	468	94	150	3.26
160	11.036.0160.17	160X9,5 SDR17 ISO S-8	160	9,5	369	530	100	166	4.68
180	11.036.0180.17	180X10,7 SDR17 ISO S-8	180	10,7	390	568	107	179	6.26
200	11.036.0200.17	200X11,9 SDR17 ISO S-8	200	11,9	416	605	114	191	8.32
225	11.036.0225.17	225X13,4 SDR17 ISO S-8	225	13,4	474	678	122	206	11.86
32	11.036.0032.11	32X2,9 SDR11 ISO S-5	32	2,9	131	195	45	65	0.11
40	11.036.0040.11	40X3,7 SDR11 ISO S-5	40	3,7	137	211	50	72	0.17
50	11.036.0050.11	50X4,6 SDR11 ISO S-5	50	4,6	148,5	228	56	81	0.27
63	11.036.0063.11	63X5,8 SDR11 ISO S-5	63	5,8	170	262	64	93	0.50
75	11.036.0075.11	75X6,8 SDR11 ISO S-5	75	6,8	192	294	71	103	0.78
90	11.036.0090.11	90X8,2 SDR11 ISO S-5	90	8,2	230	351	83	122	1.30
110	11.036.0110.11	110X10,0 SDR11 ISO S-5	110	10	250,5	385	84	131	2.05
125	11.036.0125.11	125X11,4 SDR11 ISO S-5	125	11,4	300	431	90	140	3.00
140	11.036.0140.11	140X12,7 SDR11 ISO S-5	140	12,7	323	467	94	150	4.10
160	11.036.0160.11	160X14,6 SDR11 ISO S-5	160	14,6	362	526	100	166	6.20
180	11.036.0180.11	180X16,4 SDR11 ISO S-5	180	16,4	385	568	107	179	8.38
200	11.036.0200.11	200X18,2 SDR11 ISO S-5	200	18,2	422,5	605	114	191	10.85
225	11.036.0225.11	225X20,5 SDR11 ISO S-5	225	20,5	474	678	122	206	15.42