


Segmented Fittings

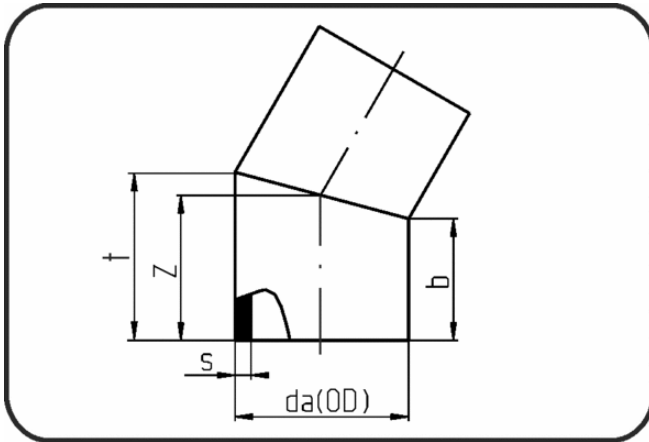

Code: 329

- **Bend 30°**
- segmented/inside bead removed
- derating factor 0.8
- **Butt-welding**
- **PPH grey**

Dimension	Code	Detail	da(OD) mm	s mm	b mm	z mm	Weight
560	12.329.0560.41	560X13,7 SDR41 ISO S-20	560	13,7	350	425	18.80
630	12.329.0630.41	630X15,4 SDR41 ISO S-20	630	15,4	350	434	24.20
710	12.329.0710.41	710X17,4 SDR41 ISO S-20	710	17,4	400	495	35.90
800	12.329.0800.41	800X19,6 SDR41 ISO S-20	800	19,6	400	507	56.00
900	12.329.0900.41	900X22,0 SDR41 ISO S-20	900	22	400	521	72.10
1000	12.329.1000.41	1000X24,5 SDR41 ISO S-20	1.000	24,5	500	634	91.00
1200	12.329.1200.41	1200X29,4 SDR41 ISO S-20	1.200	29,4	500	661	136.00
560	12.329.0560.33	560X17,2 SDR33 ISO S-16	560	17,2	350	425	23.30
630	12.329.0630.33	630X19,3 SDR33 ISO S-16	630	19,3	350	434	30.10
710	12.329.0710.33	710X21,8 SDR33 ISO S-16	710	21,8	400	495	44.70
800	12.329.0800.33	800X24,5 SDR33 ISO S-16	800	24,5	400	507	69.40
900	12.329.0900.33	900X27,6 SDR33 ISO S-16	900	27,6	400	500	90.00
1000	12.329.1000.33	1000X30,6 SDR33 ISO S-16	1.000	30,6	500	634	113.00
1200	12.329.1200.33	1200X36,7 SDR33 ISO S-16	1.200	36,7	500	661	169.00
560	12.329.0560.26	560X21,4 SDR26 ISO S-12,5	560	21,4	350	425	28.70
630	12.329.0630.26	630X24,1 SDR26 ISO S-12,5	630	24,1	350	434	37.30
710	12.329.0710.26	710X27,2 SDR26 ISO S-12,5	710	27,2	400	495	55.20
800	12.329.0800.26	800X30,6 SDR26 ISO S-12,5	800	30,6	400	507	86.00
900	12.329.0900.26	900X34,4 SDR26 ISO S-12,5	900	34,4	400	521	93.20
560	12.329.0560.17	560X31,7 SDR17,6 ISO S-8,3	560	31,7	350	425	41.70
630	12.329.0630.17	630X35,7 SDR17,6 ISO S-8,3	630	35,7	350	434	54.10
710	12.329.0710.17	710X40,2 SDR17,6 ISO S-8,3	710	40,2	400	495	79.90
800	12.329.0800.17	800X45,3 SDR17,6 ISO S-8,3	800	47,4	400	507	104.00