


Elongated Fittings

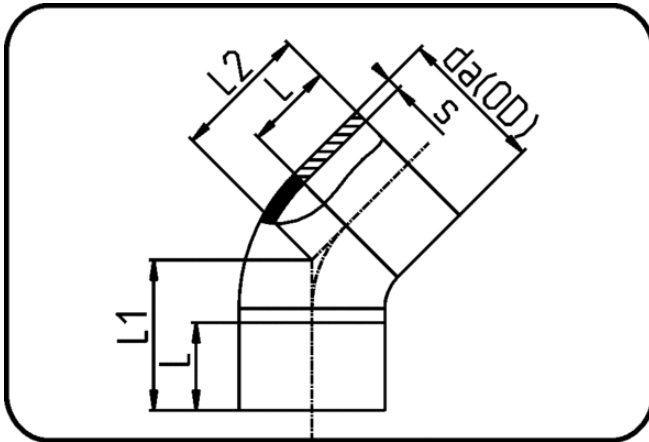

Code: 001.20

- Bend 45°
- 300mm both sides elongated
- injection moulded+welded
- **Butt + E-socket-welding**
- PP grey

Dimension	Code	Detail	da(OD) mm	s mm	L2 mm	L mm	L1 mm	Weight
110	11.001.2110.33	110X3,4 SDR33 ISO S-16	110	3,4	346	300	356	0.79
125	11.001.2125.33	125X3,9 SDR33 ISO S-16	125	3,9	352	300	362	1.09
140	11.001.2140.33	140X4,3 SDR33 ISO S-16	140	4,3	358	300	368	1.40
160	11.001.2160.33	160X4,9 SDR33 ISO S-16	160	4,9	364	300	389	1.76
180	11.001.2180.33	180X5,5 SDR33 ISO S-16	180	5,5	375	300	395	2.24
200	11.001.2200.33	200X6,2 SDR33 ISO S-16	200	6,2	383	300	403	3.00
225	11.001.2225.33	225X6,9 SDR33 ISO S-16	225	6,9	383	300	403	3.63
250	11.001.2250.33	250X7,7 SDR33 ISO S-16	250	7,7	393	300	413	5.00
280	11.001.2280.33	280X8,6 SDR33 ISO S-16	280	8,6	408	300	438	6.05
315	11.001.2315.33	315X9,7 SDR33 ISO S-16	315	9,7	424	300	464	8.30
355	11.001.2355.33	355X10,9 SDR33 ISO S-16	355	10,9	424	300	464	10.40
400	11.001.2400.33	400X12,3 SDR33 ISO S-16	400	12,3	424	300	469	12.75
450	11.001.2450.33	450X13,8 SDR33 ISO S-16	450	13,8	466	300	511	18.10
355	11.001.2355.17	355X20,1 SDR17,6 ISO S-8,3	355	20,1	424	300	464	19.50
400	11.001.2400.17	400X22,7 SDR17,6 ISO S-8,3	400	22,7	424	300	464	22.70
450	11.001.2450.17	450X25,5 SDR17,6 ISO S-8,3	450	25,5	466	300	511	32.60
500	11.001.2500.17	500X28,3 SDR17,6 ISO S-8,3	500	28,3	466	300	511	39.20
355	11.001.2355.11	355X32,2 SDR11 ISO S-5	355	32,2	424	300	464	28.90
400	11.001.2400.11	400X36,3 SDR11 ISO S-5	400	36,3	424	300	469	34.70
450	11.001.2450.11	450X40,9 SDR11 ISO S-5	450	40,9	466	300	511	47.80
500	11.001.2500.11	500X45,4 SDR11 ISO S-5	500	45,4	466	300	511	59.30