


SURELINE II Pipes

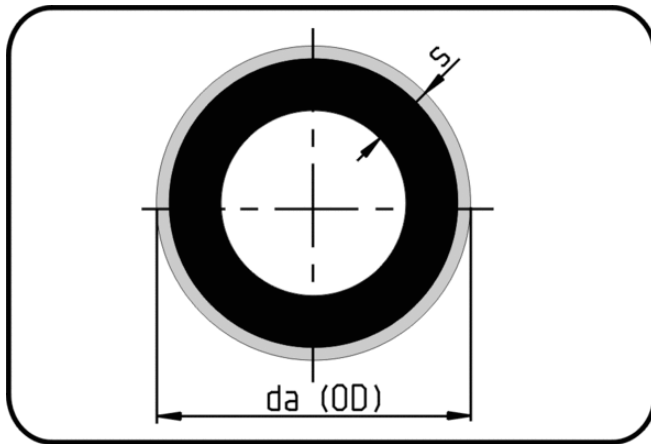

Code: 712.1

- Pipe black 12m
- with blue signal layer
- extruded
- PE 100-RC SURELINE II

From dim. 250 not available from stock - delivery time on request.

Dimension	Code	Detail	da(OD) mm	s mm	Weight
75	70.712.1075.17	75X4,5 SDR17 ISO S-8	75	4,5	1.03
90	70.712.1090.17	90X5,4 SDR17 ISO S-8	90	5,4	1.47
110	70.712.1110.17	110X6,6 SDR17 ISO S-8	110	6,6	2.19
125	70.712.1125.17	125X7,4 SDR17 ISO S-8	125	7,4	2.79
140	70.712.1140.17	140X8,3 SDR17 ISO S-8	140	8,3	3.50
160	70.712.1160.17	160X9,5 SDR17 ISO S-8	160	9,5	4.57
180	70.712.1180.17	180X10,7 SDR17 ISO S-8	180	10,7	5.77
200	70.712.1200.17	200X11,9 SDR17 ISO S-8	200	11,9	7.12
225	70.712.1225.17	225X13,4 SDR17 ISO S-8	225	13,4	9.00
250	70.712.1250.17	250X14,8 SDR17 ISO S-8	250	14,8	11.10
280	70.712.1280.17	280X16,6 SDR17 ISO S-8	280	16,6	13.90
315	70.712.1315.17	315X18,7 SDR17 ISO S-8	315	18,7	17.60
355	70.712.1355.17	355X21,1 SDR17 ISO S-8	355	21,1	22.40
400	70.712.1400.17	400X23,7 SDR17 ISO S-8	400	23,7	28.30
450	70.712.1450.17	450X26,7 SDR17 ISO S-8	450	26,7	35.80
500	70.712.1500.17	500X29,7 SDR17 ISO S-8	500	29,7	44.20
560	70.712.1560.17	560X33,2 SDR17 ISO S-8	560	33,2	55.40
630	70.712.1630.17	630X37,4 SDR17 ISO S-8	630	37,4	70.20
710	70.712.1710.17	710X42,1 SDR17 ISO S-8	710	42,1	89.00
800	70.712.1800.17	800X47,4 SDR17 ISO S-8	800	47,4	113.00
900	70.712.1900.17	900X53,3 SDR17 ISO S-8	900	53,3	143.00
1000	70.712.1100.17	1000X59,3 SDR17 ISO S-8	1.000	59,3	176.00
1200	70.712.1120.17	1200X71,1 SDR17 ISO S-8	1.200	71,1	254.00
75	70.712.1075.11	75X6,8 SDR11 ISO S-5	75	6,8	1.48
90	70.712.1090.11	90X8,2 SDR11 ISO S-5	90	8,2	2.14
110	70.712.1110.11	110X10,0 SDR11 ISO S-5	110	10	3.18
125	70.712.1125.11	125X11,4 SDR11 ISO S-5	125	11,4	4.12

Dimension	Code	Detail	da(OD) mm	s mm	Weight
140	70.712.1140.11	140X12,7 SDR11 ISO S-5	140	12,7	5.13
160	70.712.1160.11	160X14,6 SDR11 ISO S-5	160	14,6	6.74
180	70.712.1180.11	180X16,4 SDR11 ISO S-5	180	16,4	8.51
200	70.712.1200.11	200X18,2 SDR11 ISO S-5	200	18,2	10.50
225	70.712.1225.11	225X20,5 SDR11 ISO S-5	225	20,5	13.30
250	70.712.1250.11	250X22,7 SDR11 ISO S-5	250	22,7	16.31
280	70.712.1280.11	280X25,4 SDR11 ISO S-5	280	25,4	20.50
315	70.712.1315.11	315X28,6 SDR11 ISO S-5	315	28,6	25.90
355	70.712.1355.11	355X32,2 SDR11 ISO S-5	355	32,2	32.90
400	70.712.1400.11	400X36,3 SDR11 ISO S-5	400	36,3	41.70
450	70.712.1450.11	450X40,9 SDR11 ISO S-5	450	40,9	52.80
500	70.712.1500.11	500X45,4 SDR11 ISO S-5	500	45,4	65.20
560	70.712.1560.11	560X50,8 SDR11 ISO S-5	560	50,8	81.70
630	70.712.1630.11	630X57,2 SDR11 ISO S-5	630	57,2	103.00
710	70.712.1710.11	710X64,5 SDR11 ISO S-5	710	64,5	131.00
800	70.712.1800.11	800X72,6 SDR11 ISO S-5	800	72,6	167.00
900	70.712.1900.11	900X81,7 SDR11 ISO S-5	900	81,7	211.00
1000	70.712.1100.11	1000X90,8 SDR11 ISO S-5	1.000	90,8	260.00
1200	70.712.1120.11	1200X108,9 SDR11 ISO S-5	1.200	108,9	382.00