


SURELINE III Pipes

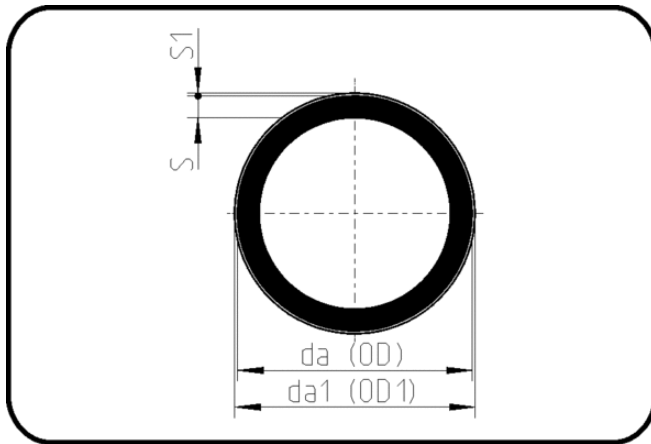

Code: 712.8

- Pipe black 12m
- with brown protective layer
- with 4 green stripes
- extruded
- **PE 100-RC SURELINE III**

Not available from stock - delivery time on request.

| Dimension | Code | Detail | da(OD) mm | da(OD1) mm | s mm | s1 mm | Weight |
|-----------|----------------|-------------------------|--------------|---------------|---------|----------|--------|
| 90 | 70.712.8090.17 | 90X5,4 SDR17 ISO S-8 | 90 | 93 | 5,4 | 1,5 | 2.01 |
| 110 | 70.712.8110.17 | 110X6,6 SDR17 ISO S-8 | 110 | 113 | 6,6 | 1,5 | 2.85 |
| 125 | 70.712.8125.17 | 125X7,4 SDR17 ISO S-8 | 125 | 128 | 7,4 | 1,5 | 3.54 |
| 140 | 70.712.8140.17 | 140X8,3 SDR17 ISO S-8 | 140 | 143 | 8,3 | 1,5 | 4.34 |
| 160 | 70.712.8160.17 | 160X9,5 SDR17 ISO S-8 | 160 | 164 | 9,5 | 2 | 5.77 |
| 180 | 70.712.8180.17 | 180X10,7 SDR17 ISO S-8 | 180 | 184 | 10,7 | 2 | 7.13 |
| 200 | 70.712.8200.17 | 200X11,9 SDR17 ISO S-8 | 200 | 204 | 11,9 | 2 | 8.64 |
| 225 | 70.712.8225.17 | 225X13,4 SDR17 ISO S-8 | 225 | 229,6 | 13,4 | 2,3 | 10.93 |
| 250 | 70.712.8250.17 | 250X14,8 SDR17 ISO S-8 | 250 | 254,6 | 14,8 | 2,3 | 13.18 |
| 280 | 70.712.8280.17 | 280X16,6 SDR17 ISO S-8 | 280 | 284,6 | 16,6 | 2,3 | 16.26 |
| 315 | 70.712.8315.17 | 315X18,7 SDR17 ISO S-8 | 315 | 320,4 | 18,7 | 2,7 | 20.64 |
| 355 | 70.712.8355.17 | 355X21,1 SDR17 ISO S-8 | 355 | 360,4 | 21,1 | 2,7 | 25.78 |
| 400 | 70.712.8400.17 | 400X23,7 SDR17 ISO S-8 | 400 | 405,4 | 23,7 | 2,7 | 32.40 |
| 450 | 70.712.8450.17 | 450X26,7 SDR17 ISO S-8 | 450 | 456 | 26,7 | 3 | 40.90 |
| 500 | 70.712.8500.17 | 500X29,7 SDR17 ISO S-8 | 500 | 506 | 29,7 | 3 | 49.90 |
| 560 | 70.712.8560.17 | 560X33,2 SDR17 ISO S-8 | 560 | 566 | 33,2 | 3 | 61.70 |
| 630 | 70.712.8630.17 | 630X37,4 SDR17 ISO S-8 | 630 | 636 | 37,4 | 3 | 77.10 |
| 710 | 70.712.8710.17 | 710x42,1 SDR17 ISO S-8 | 710 | 716 | 42,1 | 3 | 96.00 |
| 800 | 70.712.8800.17 | 800x47,4 SDR17 ISO S-8 | 800 | 806 | 47,4 | 3,5 | 122.00 |
| 900 | 70.712.8900.17 | 900x53,3 SDR17 ISO S-8 | 900 | 906 | 53,3 | 3,5 | 153.00 |
| 1000 | 70.712.8100.17 | 1000x59,3 SDR17 ISO S-8 | 1.000 | 1.006 | 59,3 | 4 | 189.00 |
| 1200 | 70.712.8120.17 | 1200x71,1 SDR17 ISO S-8 | 1.200 | 1.200 | 71,1 | 4 | 270.00 |
| 63 | 70.712.8063.11 | 63X5,8 SDR11 ISO S-5 | 63 | 66 | 5,8 | 1,5 | 1.44 |
| 75 | 70.712.8075.11 | 75X6,8 SDR11 ISO S-5 | 75 | 78 | 6,8 | 1,5 | 1.93 |
| 90 | 70.712.8090.11 | 90X8,2 SDR11 ISO S-5 | 90 | 93 | 8,2 | 1,5 | 2.68 |
| 110 | 70.712.8110.11 | 110X10,0 SDR11 ISO S-5 | 110 | 113 | 10 | 1,5 | 3.85 |
| 125 | 70.712.8125.11 | 125X11,4 SDR11 ISO S-5 | 125 | 128 | 11,4 | 1,5 | 4.87 |

| Dimension | Code | Detail | da(OD) mm | da(OD1) mm | s mm | s1 mm | Weight |
|-----------|----------------|--------------------------|--------------|---------------|---------|----------|--------|
| 140 | 70.712.8140.11 | 140X12,7 SDR11 ISO S-5 | 140 | 143 | 12,7 | 1,5 | 5.98 |
| 160 | 70.712.8160.11 | 160X14,6 SDR11 ISO S-5 | 160 | 164 | 14,6 | 2 | 7.95 |
| 180 | 70.712.8180.11 | 180X16,4 SDR11 ISO S-5 | 180 | 184 | 16,4 | 2 | 9.87 |
| 200 | 70.712.8200.11 | 200X18,2 SDR11 ISO S-5 | 200 | 204 | 18,2 | 2 | 11.99 |
| 225 | 70.712.8225.11 | 225X20,5 SDR11 ISO S-5 | 225 | 229,6 | 20,5 | 2,3 | 15.18 |
| 250 | 70.712.8250.11 | 250X22,7 SDR11 ISO S-5 | 250 | 254,6 | 22,7 | 2,3 | 18.45 |
| 280 | 70.712.8280.11 | 280X25,4 SDR11 ISO S-5 | 280 | 284,6 | 25,4 | 2,3 | 22.82 |
| 315 | 70.712.8315.11 | 315X28,6 SDR11 ISO S-5 | 315 | 320,4 | 28,6 | 2,7 | 28.95 |
| 355 | 70.712.8355.11 | 355X32,2 SDR11 ISO S-5 | 355 | 360,4 | 32,2 | 2,7 | 36.29 |
| 400 | 70.712.8400.11 | 400X36,3 SDR11 ISO S-5 | 400 | 405,4 | 36,3 | 2,7 | 45.88 |
| 450 | 70.712.8450.11 | 450X40,9 SDR11 ISO S-5 | 450 | 456 | 40,9 | 3 | 57.80 |
| 500 | 70.712.8500.11 | 500X45,4 SDR11 ISO S-5 | 500 | 506 | 45,4 | 3 | 70.80 |
| 560 | 70.712.8560.11 | 560X50,8 SDR11 ISO S-5 | 560 | 566 | 50,8 | 3 | 88.00 |
| 630 | 70.712.8630.11 | 630X57,2 SDR11 ISO S-5 | 630 | 636 | 57,2 | 3 | 110.40 |
| 710 | 70.712.8710.11 | 710x64,5 SDR11 ISO S-5 | 710 | 716 | 64,5 | 3 | 138.00 |
| 800 | 70.712.8800.11 | 800x72,6 SDR11 ISO S-5 | 800 | 806 | 72,6 | 3,5 | 176.00 |
| 900 | 70.712.8900.11 | 900x81,7 SDR11 ISO S-5 | 900 | 906 | 81,7 | 3,5 | 221.00 |
| 1000 | 70.712.8100.11 | 1000x90,8 SDR11 ISO S-5 | 1.000 | 1.006 | 90,8 | 4 | 273.00 |
| 1200 | 70.712.8120.11 | 1200x108,9 SDR11 ISO S-5 | 1.200 | 1.206 | 108,9 | 4 | 391.00 |