


Segmented Fittings

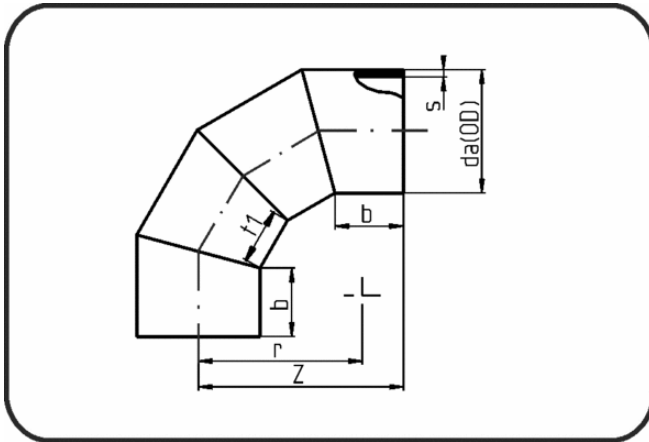

Code: 331

- Bend 90°
- segmented
- derating factor 0.8
- **Butt-welding**
- **PE 100-RC black**

From dim. 800 availability + delivery time on req.

Dimension	Code	Detail	da(OD) mm	s mm	r mm	b mm	t1 mm	z mm	Weight
560	70.331.0560.41	560X13,7 SDR41 ISO S-20	560	13,7	840	350	300	1.040	38.40
630	70.331.0630.41	630X15,4 SDR41 ISO S-20	630	15,4	945	350	338	1.126	57.00
710	70.331.0710.41	710X17,4 SDR41 ISO S-20	710	17,4	1.065	400	380	1.275	81.60
800	70.331.0800.41	800X19,6 SDR41 ISO S-20	800	19,6	1.200	400	429	1.385	112.00
900	70.331.0900.41	900X22,0 SDR41 ISO S-20	900	22	1.350	400	482	1.509	153.00
1000	70.331.1000.41	1000X24,5 SDR41 ISO S-20	1.000	24,5	1.500	500	536	1.732	218.00
1200	70.331.1200.41	1200X29,4 SDR41 ISO S-20	1.200	29,4	1.800	500	643	1.978	355.00
560	70.331.0560.33	560X17,2 SDR33 ISO S-16	560	17,2	840	350	300	1.040	47.90
630	70.331.0630.33	630X19,3 SDR33 ISO S-16	630	19,3	945	350	338	1.126	71.00
710	70.331.0710.33	710X21,8 SDR33 ISO S-16	710	21,8	1.065	400	380	1.275	102.00
800	70.331.0800.33	800X24,5 SDR33 ISO S-16	800	24,5	1.200	400	429	1.385	139.00
900	70.331.0900.33	900X27,6 SDR33 ISO S-16	900	27,6	1.350	400	482	1.509	190.00
1000	70.331.1000.33	1000X30,6 SDR33 ISO S-16	1.000	30,6	1.500	500	536	1.732	271.00
1200	70.331.1200.33	1200X36,7 SDR33 ISO S-16	1.200	36,7	1.800	500	643	1.978	440.00
560	70.331.0560.26	560X21,4 SDR26 ISO S-12,5	560	21,4	840	350	300	1.040	58.40
630	70.331.0630.26	630X24,1 SDR26 ISO S-12,5	630	24,1	945	350	338	1.126	87.00
710	70.331.0710.26	710X27,2 SDR26 ISO S-12,5	710	27,2	1.065	400	380	1.275	126.00
800	70.331.0800.26	800X30,6 SDR26 ISO S-12,5	800	30,6	1.200	400	429	1.385	172.00
900	70.331.0900.26	900X34,4 SDR26 ISO S-12,5	900	34,4	1.350	400	482	1.509	235.00
1000	70.331.1000.26	1000X38,2 SDR26 ISO S-12,5	1.000	38,2	1.500	500	536	1.732	335.00
1200	70.331.1200.26	1200X45,8 SDR26 ISO S-12,5	1.200	45,9	1.800	500	643	1.978	545.00
560	70.331.0560.17	560X33,2 SDR17 ISO S-8	560	33,2	840	350	300	1.040	88.30
630	70.331.0630.17	630X37,4 SDR17 ISO S-8	630	37,4	945	350	338	1.126	132.00
710	70.331.0710.17	710X42,1 SDR17 ISO S-8	710	42,1	1.065	400	380	1.275	190.00
800	70.331.0800.17	800X47,4 SDR17 ISO S-8	800	47,4	1.200	400	429	1.385	260.00

Dimension	Code	Detail	da(OD) mm	s mm	r mm	b mm	t1 mm	z mm	Weight
900	70.331.0900.17	900X53,3 SDR17 ISO S-8	900	53,3	1.350	400	482	1.509	355.00
1000	70.331.1000.17	1000X59,3 SDR17 ISO S-8	1.000	59,3	1.500	500	536	1.732	507.00
1200	70.331.1200.17	1200X71,1 SDR17 ISO S-8	1.200	71,1	1.800	500	643	1.978	825.00
560	70.331.0560.11	560X50,8 SDR11 ISO S-5	560	50,8	840	350	300	1.040	130.00
630	70.331.0630.11	630X57,2 SDR11 ISO S-5	630	57,2	945	350	338	1.126	195.00
710	70.331.0710.11	710X64,5 SDR11 ISO S-5	710	64,5	1.065	400	380	1.275	280.00
800	70.331.0800.11	800X72,6 SDR11 ISO S-5	800	72,6	1.200	400	429	1.385	383.00
900	70.331.0900.11	900X81,7 SDR11 ISO S-5	900	81,7	1.350	400	482	1.509	525.00
1000	70.331.1000.11	1000X90,8 SDR11 ISO S-5	1.000	90,8	1.500	500	536	1.732	749.00
1200	70.331.1200.11	1200X108,9 SDR11 ISO S-5	1.200	108,9	1.800	500	643	1.978	1,218.00