


Fittings for Socket Welding

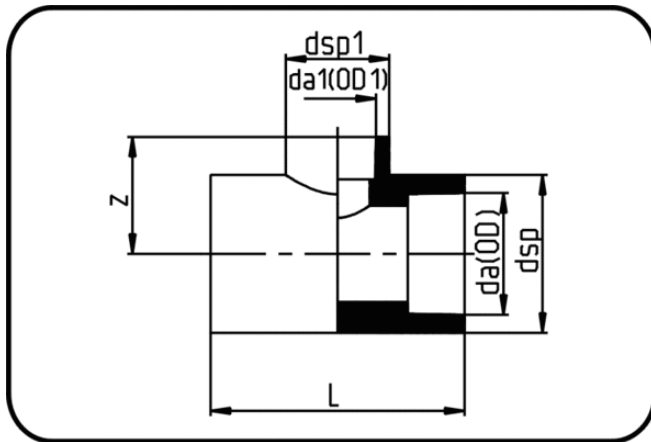

Code: 055

- Tee reduced
- injection moulded
- Socket-welding
- PE 100-RC black

Dimension	Code	Detail	da(OD) mm	da(OD1) mm	z mm	L mm	dsp mm	dsp1 mm	Weight
25/20	70.055.2520.07	25/20 - MOP 16 bar	25	20	35,5	70	34,8	35	0.05
32/20	70.055.3220.07	32/20 - MOP 16 bar	32	20	39,8	79,7	43	29,9	0.07
32/25	70.055.3225.07	32/25 - MOP 16 bar	32	25	40	79	43	35	0.07
40/20	70.055.4020.07	40/20 - MOP 16 bar	40	20	46	91	53	30	0.10
40/25	70.055.4025.07	40/25 - MOP 16 bar	40	25	46,8	92	53,2	35,3	0.10
40/32	70.055.4032.07	40/32 - MOP 16 bar	40	32	45	91	53	43	0.11
50/20	70.055.5020.07	50/20 - MOP 16 bar	50	20	50	107,5	65	30	0.16
50/25	70.055.5025.07	50/25 - MOP 16 bar	50	25	51	107,5	65	35,5	0.16
50/32	70.055.5032.07	50/32 - MOP 16 bar	50	32	54	107,5	65	43	0.17
50/40	70.055.5040.07	50/40 - MOP 16 bar	50	40	52,5	107,5	65	53	0.18
63/25	70.055.6325.07	63/25 - MOP 16 bar	63	25	65	128,5	80	36	0.28
63/32	70.055.6332.07	63/32 - MOP 16 bar	63	32	65	129,5	81	43,5	0.29
63/40	70.055.6340.07	63/40 - MOP 16 bar	63	40	65	129,5	81	53	0.29
63/50	70.055.6350.07	63/50 - MOP 16 bar	63	50	65	129,5	81	66	0.30