


## Sweep Bends

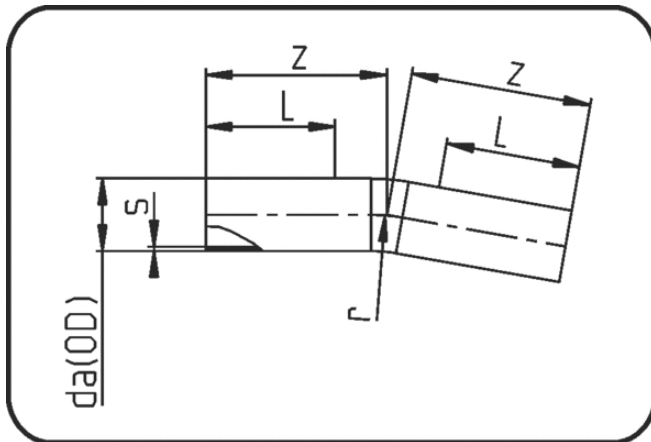

Code: 394

- Sweep Bend 11°
- radius 1.5 x OD
- formed out of pipe
- **Butt + E-socket-welding**
- **PE 100-RC black**

| Dimension | Code           | Detail                   | da(OD)<br>mm | s<br>mm | z<br>mm | r<br>mm | L<br>mm | Weight |
|-----------|----------------|--------------------------|--------------|---------|---------|---------|---------|--------|
| 90        | 70.394.0090.11 | 90 SDR11 ISO S-5 16 bar  | 90           | 8,2     | 350     | 135     | 150     | 1.42   |
| 110       | 70.394.0110.11 | 110 SDR11 ISO S-5 16 bar | 110          | 10      | 330     | 165     | 150     | 2.14   |
| 125       | 70.394.0125.11 | 125 SDR11 ISO S-5 16 bar | 125          | 11,4    | 380     | 188     | 150     | 3.38   |
| 140       | 70.394.0140.11 | 140 SDR11 ISO S-5 16 bar | 140          | 12,7    | 395     | 210     | 150     | 3.96   |
| 160       | 70.394.0160.11 | 160 SDR11 ISO S-5 16 bar | 160          | 14,6    | 415     | 480     | 150     | 5.54   |
| 180       | 70.394.0180.11 | 180 SDR11 ISO S-5 16 bar | 180          | 16,4    | 450     | 270     | 150     | 7.49   |
| 200       | 70.394.0200.11 | 200 SDR11 ISO S-5 16 bar | 200          | 18,2    | 480     | 300     | 150     | 9.88   |
| 225       | 70.394.0225.11 | 225 SDR11 ISO S-5 16 bar | 225          | 20,5    | 510     | 338     | 150     | 13.36  |
| 250       | 70.394.0250.11 | 250 SDR11 ISO S-5 16 bar | 250          | 22,7    | 540     | 375     | 250     | 17.66  |
| 280       | 70.394.0280.11 | 280 SDR11 ISO S-5 16 bar | 280          | 25,4    | 550     | 420     | 300     | 22.20  |
| 315       | 70.394.0315.11 | 315 SDR11 ISO S-5 16 bar | 315          | 28,6    | 700     | 473     | 450     | 36.30  |
| 355       | 70.394.0355.11 | 355 SDR11 ISO S-5 16 bar | 355          | 32,2    | 700     | 533     | 450     | 46.00  |
| 400       | 70.394.0400.11 | 400 SDR11 ISO S-5 16 bar | 400          | 36,3    | 850     | 600     | 550     | 70.90  |
| 450       | 70.394.0450.11 | 450 SDR11 ISO S-5 16 bar | 450          | 40,9    | 900     | 675     | 550     | 95.00  |
| 500       | 70.394.0500.11 | 500 SDR11 ISO S-5 16 bar | 500          | 45,4    | 1.000   | 750     | 600     | 130.00 |
| 560       | 70.394.0560.11 | 560 SDR11 ISO S-5 16 bar | 560          | 50,8    | 1.050   | 840     | 650     | 172.00 |
| 630       | 70.394.0630.11 | 630 SDR11 ISO S-5 16 bar | 630          | 57,2    | 1.250   | 945     | 750     | 258.00 |