


Sweep Bends

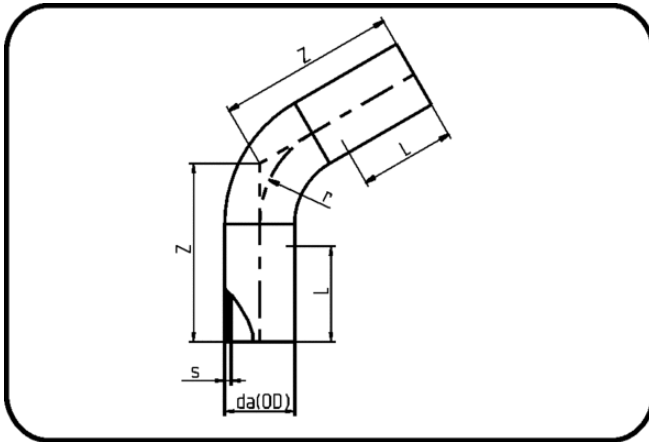

Code: 398

- Sweep Bend 60°
- radius 1.5 x OD
- formed out of pipe
- **Butt + E-socket-welding**
- **PE 100-RC black**

| Dimension | Code | Detail | da(OD) mm | s mm | z mm | r mm | L mm | Weight |
|-----------|----------------|--------------------------|--------------|---------|---------|---------|---------|--------|
| 90 | 70.398.0090.11 | 90 SDR11 ISO S-5 16 bar | 90 | 8,2 | 350 | 135 | 260 | 1.28 |
| 110 | 70.398.0110.11 | 110 SDR11 ISO S-5 16 bar | 110 | 10 | 340 | 165 | 240 | 2.07 |
| 125 | 70.398.0125.11 | 125 SDR11 ISO S-5 16 bar | 125 | 11,4 | 390 | 188 | 280 | 2.88 |
| 140 | 70.398.0140.11 | 140 SDR11 ISO S-5 16 bar | 140 | 12,7 | 400 | 210 | 280 | 4.62 |
| 160 | 70.398.0160.11 | 160 SDR11 ISO S-5 16 bar | 160 | 14,6 | 430 | 240 | 290 | 5.72 |
| 180 | 70.398.0180.11 | 180 SDR11 ISO S-5 16 bar | 180 | 16,4 | 460 | 270 | 300 | 8.51 |
| 200 | 70.398.0200.11 | 200 SDR11 ISO S-5 16 bar | 200 | 18,2 | 490 | 300 | 320 | 10.19 |
| 225 | 70.398.0225.11 | 225 SDR11 ISO S-5 16 bar | 225 | 20,5 | 530 | 338 | 330 | 13.85 |
| 250 | 70.398.0250.11 | 250 SDR11 ISO S-5 16 bar | 250 | 22,7 | 700 | 375 | 330 | 22.82 |
| 280 | 70.398.0280.11 | 280 SDR11 ISO S-5 16 bar | 280 | 25,4 | 720 | 420 | 250 | 28.70 |
| 315 | 70.398.0315.11 | 315 SDR11 ISO S-5 16 bar | 315 | 28,6 | 720 | 473 | 250 | 44.03 |
| 355 | 70.398.0355.11 | 355 SDR11 ISO S-5 16 bar | 355 | 32,2 | 730 | 533 | 400 | 46.00 |
| 400 | 70.398.0400.11 | 400 SDR11 ISO S-5 16 bar | 400 | 36,3 | 780 | 637 | 300 | 65.00 |
| 450 | 70.398.0450.11 | 450 SDR11 ISO S-5 16 bar | 450 | 40,9 | 820 | 711 | 300 | 87.00 |
| 500 | 70.398.0500.11 | 500 SDR11 ISO S-5 16 bar | 500 | 45,4 | 960 | 783 | 350 | 125.00 |
| 560 | 70.398.0560.11 | 560 SDR11 ISO S-5 16 bar | 560 | 50,8 | 980 | 877 | 350 | 160.00 |
| 630 | 70.398.0630.11 | 630 SDR11 ISO S-5 16 bar | 630 | 57,2 | 1.200 | 955 | 350 | 247.00 |