


## Segmented Fittings

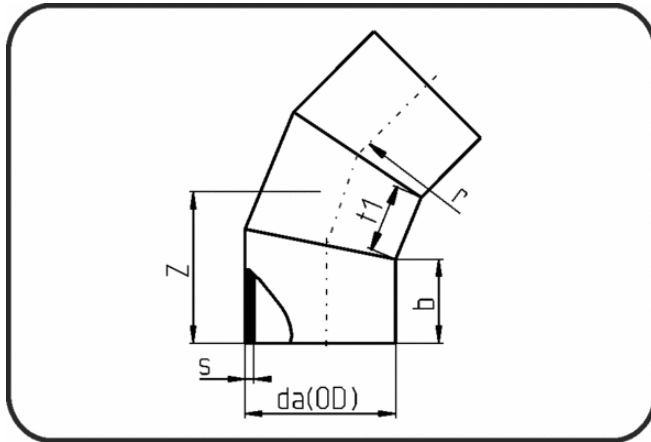

Code: 330

- Bend 45°
- segmented
- derating factor 0.8
- **Butt-welding**
- **PE 100-RC black**

From dim. 800 availability and delivery time on request.

Dimension	Code	Detail	da(OD) mm	s mm	r mm	b mm	t1 mm	z mm	Weight
560	70.330.0560.41	560X13,7 SDR41 ISO S-20	560	13,7	840	350	223	587	27.89
630	70.330.0630.41	630X15,4 SDR41 ISO S-20	630	15,4	945	350	251	616	36.00
710	70.330.0710.41	710X17,4 SDR41 ISO S-20	710	17,4	1.065	400	282,5	700	52.00
800	70.330.0800.41	800X19,6 SDR41 ISO S-20	800	19,6	1.200	400	318,3	738	70.00
900	70.330.0900.41	900X22,0 SDR41 ISO S-20	900	22	1.330	400	358	780	93.00
1000	70.330.1000.41	1000X24,5 SDR41 ISO S-20	1.000	24,5	1.500	500	398	923	136.00
1200	70.330.1200.41	1200X29,4 SDR41 ISO S-20	1.200	29,4	1.800	500	477,5	1.007	214.00
1400	70.330.1400.41	1400X34,3 SDR41 ISO S-20	1.400	34,3	1.705	500	400	1.006	290.00
1600	70.330.1600.41	1600X39,2 SDR41 ISO S-20	1.600	39,2	1.920	500	446	1.073	404.00
1800	70.330.1800.41	1800X44,0 SDR41 ISO S-20	1.800	44	2.160	500	501	1.144	543.00
2000	70.330.2000.41	2000X48,9 SDR41 ISO S-20	2.000	48,9	2.400	500	557	1.216	711.00
2250	70.330.2250.41	2250X55,0 SDR41 ISO S-20	2.250	55	2.700	500	627	1.305	965.00
560	70.330.0560.33	560X17,2 SDR33 ISO S-16	560	17,2	840	350	223	587	34.66
630	70.330.0630.33	630X19,3 SDR33 ISO S-16	630	19,3	945	350	251	616	45.00
710	70.330.0710.33	710X21,8 SDR33 ISO S-16	710	21,8	1.065	400	282,5	700	65.00
800	70.330.0800.33	800X24,5 SDR33 ISO S-16	800	24,5	1.200	400	318,3	738	87.00
900	70.330.0900.33	900X27,6 SDR33 ISO S-16	900	27,6	1.330	400	358	780	116.00
1000	70.330.1000.33	1000X30,6 SDR33 ISO S-16	1.000	30,6	1.500	500	398	923	169.00
1200	70.330.1200.33	1200X36,7 SDR33 ISO S-16	1.200	36,7	1.800	500	477,5	1.007	265.00
1600	70.330.1600.33	1600X49,0 SDR33 ISO S-16	1.600	49	1.920	500	446	1.073	501.00
1800	70.330.1800.33	1800X55,1 SDR33 ISO S-16	1.800	55,1	2.160	500	501	1.144	676.00
2000	70.330.2000.33	2000X61,2 SDR33 ISO S-16	2.000	61,2	2.400	500	557	1.216	885.00
2250	70.330.2250.33	2250X68,9 SDR33 ISO S-16	2.250	68,9	2.700	500	627	1.305	1,200.00
560	70.330.0560.26	560X21,4 SDR26 ISO S-12,5	560	21,4	840	350	223	587	42.30
630	70.330.0630.26	630X24,1 SDR26 ISO S-12,5	630	24,1	945	350	251	616	56.00
710	70.330.0710.26	710X27,2 SDR26 ISO S-12,5	710	27,2	1.065	400	282,5	700	80.00
800	70.330.0800.26	800X30,6 SDR26 ISO S-12,5	800	30,6	1.200	400	318,3	738	107.00

Dimension	Code	Detail	da(OD) mm	s mm	r mm	b mm	t1 mm	z mm	Weight
900	70.330.0900.26	900X34,4 SDR26 ISO S-12,5	900	34,4	1.330	400	358	780	143.00
1000	70.330.1000.26	1000X38,2 SDR26 ISO S-12,5	1.000	38,2	1.500	500	398	923	210.00
1200	70.330.1200.26	1200X45,8 SDR26 ISO S-12,5	1.200	45,9	1.800	500	477,5	1.007	328.00
1400	70.330.1400.26	1400X53,5 SDR26 ISO S-12,5	1.400	53,5	1.705	500	400	1.006	447.00
1600	70.330.1600.26	1600X61,2 SDR26 ISO S-12,5	1.600	61,2	1.920	500	446	1.073	621.00
1800	70.330.1800.26	1800X68,8 SDR26 ISO S-12,5	1.800	68,8	2.160	500	501	1.144	836.00
2000	70.330.2000.26	2000X76,4 SDR26 ISO S-12,5	2.000	76,4	2.400	500	557	1.216	1,095.00
2250	70.330.2250.26	2250X86,0 SDR26 ISO S-12,5	2.250	86	2.700	500	627	1.305	1,485.00
560	70.330.0560.17	560X33,2 SDR17 ISO S-8	560	33,2	840	350	223	587	64.00
630	70.330.0630.17	630X37,4 SDR17 ISO S-8	630	37,4	945	350	251	616	84.00
710	70.330.0710.17	710X42,1 SDR17 ISO S-8	710	42,1	1.065	400	282,5	700	122.00
800	70.330.0800.17	800X47,4 SDR17 ISO S-8	800	47,4	1.200	400	318,3	738	162.00
900	70.330.0900.17	900X53,3 SDR17 ISO S-8	900	53,3	1.350	400	358	780	216.00
1000	70.330.1000.17	1000X59,2 SDR17 ISO S-8	1.000	59,3	1.500	500	398	923	317.00
1200	70.330.1200.17	1200X71,1 SDR17 ISO S-8	1.200	71,1	1.800	500	477,5	1.007	496.00
1400	70.330.1400.17	1400X83,0 SDR17 ISO S-8	1.400	83	1.705	500	400	1.006	676.00
1600	70.330.1600.17	1600X94,8 SDR17 ISO S-8	1.600	94,8	1.920	500	446	1.073	939.00
1800	70.330.1800.17	1800X106,6 SDR17 ISO S-8	1.800	106,6	2.160	500	501	1.144	1,265.00
2000	70.330.2000.17	2000X118,5 SDR17 ISO S-8	2.000	118,5	2.400	500	557	1.216	1,658.00
2250	70.330.2250.17	2250X133,3 SDR17 ISO S-8	2.250	133,3	2.700	500	627	1.305	2,248.00
560	70.330.0560.11	560X50,8 SDR11 ISO S-5	560	50,8	840	350	223	587	94.30
630	70.330.0630.11	630X57,2 SDR11 ISO S-5	630	57,2	945	350	251	616	124.00
710	70.330.0710.11	710X64,5 SDR11 ISO S-5	710	64,5	1.065	400	282,5	700	179.00
800	70.330.0800.11	800x72,6 SDR11 ISO S-5	800	72,6	1.200	400	318,3	738	239.00
900	70.330.0900.11	900X81,7 SDR11 ISO S-5	900	81,7	1.350	400	358	780	320.00
1000	70.330.1000.11	1000X90,8 SDR11 ISO S-5	1.000	90,8	1.500	500	398	923	468.00
1200	70.330.1200.11	1200X108,9 SDR11 ISO S-5	1.200	108,9	1.800	500	477,5	1.007	733.00
1400	70.330.1400.11	1400X127,0 SDR11 ISO S-5	1.400	127	1.705	500	400	1.006	998.00
1600	70.330.1600.11	1600X145,2 SDR11 ISO S-5	1.600	145,2	1.920	500	446	1.073	1,387.00