


## Fittings

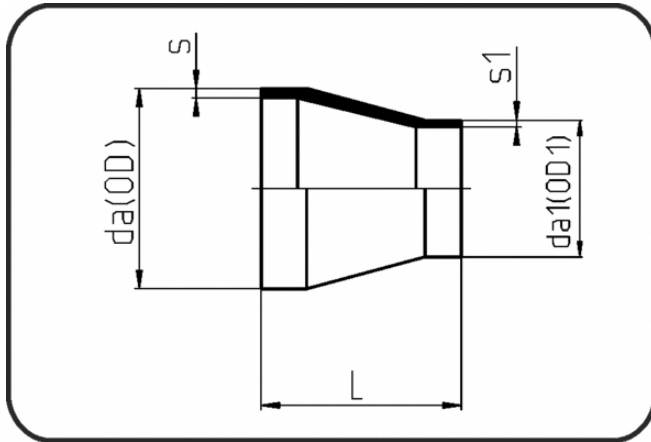

Code: 317

- Reducer concentric
- machined
- Butt + IR-welding
- PVDF UHP natural

Dimension	Code	Detail	da(OD) mm	da(OD1) mm	s mm	L mm	s1 mm	Weight
110/75	35.317.1175.33	110/75 SDR33 ISO S-16	110	75	3,4	100	2,3	0.27
125/90	35.317.1290.33	125/90 SDR33 ISO S-16	125	90	3,9	100	2,8	0.29
125/110	35.317.1211.33	125/110 SDR33 ISO S-16	125	110	3,9	100	3,4	0.31
140/75	35.317.1475.33	140/75 SDR33 ISO S-16	140	75	4,3	100	2,3	0.36
140/90	35.317.1490.33	140/90 SDR33 ISO S-16	140	90	4,3	100	2,8	0.48
140/125	35.317.1412.33	140/125 SDR33 ISO S-16	140	125	4,3	100	3,9	0.39
160/90	35.317.1690.33	160/90 SDR33 ISO S-16	160	90	4,9	120	2,8	0.63
180/110	35.317.1811.33	180/110 SDR33 ISO S-16	180	110	5,5	120	3,4	0.73
180/160	35.317.1816.33	180/160 SDR33 ISO S-16	180	160	5,5	80	4,9	0.67
200/140	35.317.2014.33	200/140 SDR33 ISO S-16	200	140	6,2	120	4,3	1.06
200/160	35.317.2016.33	200/160 SDR33 ISO S-16	200	160	6,2	120	4,9	0.97
225/110	35.317.2211.33	225/110 SDR33 ISO S-16	225	110	6,9	160	3,4	1.36
225/140	35.317.2214.33	225/140 SDR33 ISO S-16	225	140	6,9	130	4,3	1.19
225/200	35.317.2220.33	225/200 SDR33 ISO S-16	225	200	6,9	90	6,2	0.74
250/200	35.317.2521.33	250/200 SDR33 ISO S-16	250	200	7,7	120	6,2	1.02
280/160	35.317.2816.33	280/160 SDR33 ISO S-16	280	160	8,6	130	4,9	1.55
280/225	35.317.2822.33	280/225 SDR33 ISO S-16	280	225	8,6	120	6,9	1.69
63/20	35.317.6320.21	63/20 SDR21 ISO S-10	63	20	3	80	1,9	0.08
75/20	35.317.7520.21	75/20 SDR21 ISO S-10	75	20	3,6	80	1,9	0.12
75/25	35.317.7525.21	75/25 SDR21 ISO S-10	75	25	3,6	80	1,9	0.12
75/32	35.317.7532.21	75/32 SDR21 ISO S-10	75	32	3,6	80	2,4	0.11
90/20	35.317.9020.21	90/20 SDR21 ISO S-10	90	20	4,3	80	1,9	0.18
90/25	35.317.9025.21	90/25 SDR21 ISO S-10	90	25	4,3	80	1,9	0.16
90/32	35.317.9032.21	90/32 SDR21 ISO S-10	90	32	4,3	80	2,4	0.20
90/40	35.317.9040.21	90/40 SDR21 ISO S-10	90	40	4,3	80	2,4	0.15
110/20	35.317.1120.21	110/20 SDR21 ISO S-10	110	20	5,3	100	1,9	0.28
110/25	35.317.1125.21	110/25 SDR21 ISO S-10	110	25	5,3	100	1,9	0.29
110/32	35.317.1132.21	110/32 SDR21 ISO S-10	110	32	5,3	100	2,4	0.32

Dimension	Code	Detail	da(OD) mm	da(OD1) mm	s mm	L mm	s1 mm	Weight
110/40	35.317.1140.21	110/40 SDR21 ISO S-10	110	40	5,3	100	2,4	0.35
110/50	35.317.1150.21	110/50 SDR21 ISO S-10	110	50	5,3	100	3	0.35
125/63	35.317.1263.21	125/63 SDR21 ISO S-10	125	63	6	100	3	0.41
125/90	35.317.1290.21	125/90 SDR21 ISO S-10	125	90	6	100	4,3	0.44
125/110	35.317.1211.21	125/110 SDR21 ISO S-10	125	110	6	100	5,3	0.43
140/50	35.317.1450.21	140/50 SDR21 ISO S-10	140	50	6,7	120	3	0.50
140/75	35.317.1475.21	140/75 SDR21 ISO S-10	140	75	6,7	100	3,6	0.53
140/90	35.317.1490.21	140/90 SDR21 ISO S-10	140	90	6,7	100	4,3	0.49
140/125	35.317.1412.21	140/125 SDR21 ISO S-10	140	125	6,7	100	6	0.55
160/32	35.317.1632.21	160/32 SDR21 ISO S-10	160	32	7,7	160	2,4	0.99
160/63	35.317.1663.21	160/63 SDR21 ISO S-10	160	63	7,7	150	3	0.86
180/90	35.317.1890.21	180/90 SDR21 ISO S-10	180	90	8,6	130	4,3	0.99
180/140	35.317.1814.21	180/140 SDR21 ISO S-10	180	140	8,6	100	6,7	0.93
200/90	35.317.2090.21	200/90 SDR21 ISO S-10	200	90	9,6	160	4,3	1.07
200/110	35.317.2011.21	200/110 SDR21 ISO S-10	200	110	9,6	130	5,3	1.19
200/140	35.317.2014.21	200/140 SDR21 ISO S-10	200	140	9,6	120	6,7	1.22
200/160	35.317.2016.21	200/160 SDR21 ISO S-10	200	160	9,6	120	7,7	1.38
225/110	35.317.2211.21	225/110 SDR21 ISO S-10	225	110	10,8	160	5,3	1.80
225/140	35.317.2214.21	225/140 SDR21 ISO S-10	225	140	10,8	130	6,7	1.66
250/200	35.317.2521.21	250/200 SDR21 ISO S-10	250	200	11,9	120	9,6	1.55
280/160	35.317.2816.21	280/160 SDR21 ISO S-10	280	160	13,4	130	7,7	2.28
280/200	35.317.2820.21	280/200 SDR21 ISO S-10	280	200	13,4	120	9,6	2.40
280/225	35.317.2822.21	280/225 SDR21 ISO S-10	280	225	13,4	120	10,8	2.50