


Kurzschenkelige Fittings

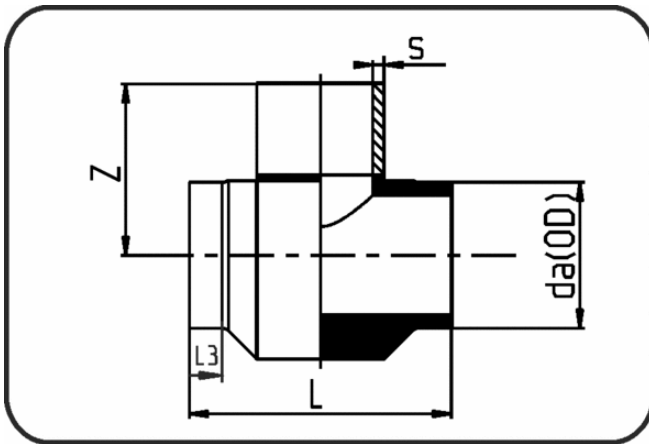

Code: 307.1

- T-Stück
- kurze Schenkel
- mechanisch gefertigt
- **Stumpfschweissung**
- **PE 100-RC schwarz**

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L3 mm	d1 mm	L mm	Gewicht
250	70.307.2525.09	250 SDR9 ISO S-4	250	27,9	355	50	406	400	21.20
280	70.307.2828.09	280 SDR9 ISO S-4	280	31,3	370	75	390	480	26.22
315	70.307.3131.09	315 SDR9 ISO S-4	315	35,2	387,5	75	490	520	43.00
355	70.307.3535.09	355 SDR9 ISO S-4	355	39,7	352,5	75	550	560	35.00
400	70.307.4040.09	400 SDR9 ISO S-4	400	44,7	530	75	540	600	76.70
450	70.307.4545.09	450 SDR9 ISO S-4	450	50,3	555	75	600	650	45.20
500	70.307.5050.09	500 SDR9 ISO S-4	500	55,8	580	75	660	710	45.60
560	70.307.5656.09	560 SDR9 ISO S-4	560	62,5	845	150	750	920	188.00
630	70.307.6363.09	630 SDR9 ISO S-4	630	70,3	880	150	830	990	252.00