


Fittings with short Spigot

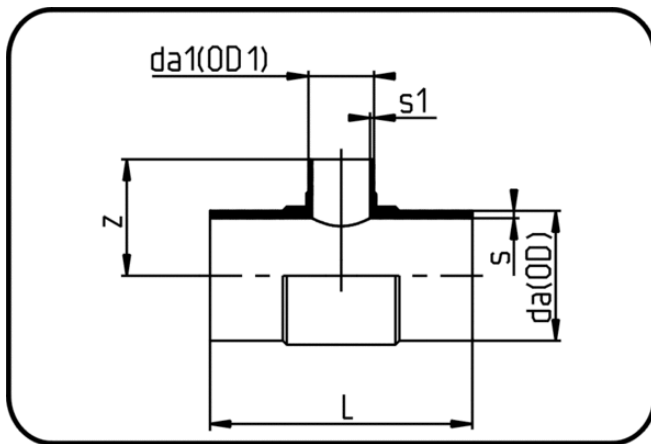

Code: 016

- Tee reduced
- short spigot
- injection moulded
- **Butt-welding**
- **PE 100-RC black**

Dimension	Code	Detail	da(OD) mm	da(OD1) mm	s mm	z mm	L mm	s1 mm	Weight
125/63	70.016.1263.11	125/63 SDR11 ISO S-5	125	63	11,4	112	275	5,8	1.42
140/63	70.016.1463.11	140/63 SDR11 ISO S-5	140	63	12,7	120	302	5,8	1.88
140/75	70.016.1475.11	140/75 SDR11 ISO S-5	140	75	12,7	130	302	6,8	1.85
140/90	70.016.1490.11	140/90 SDR11 ISO S-5	140	90	12,7	130	305	8,2	1.97
140/110	70.016.1411.11	140/110 SDR11 ISO S-5	140	110	12,7	141	305	10	2.28
160/125	70.016.1612.11	160/125 SDR11 ISO S-5	160	125	14,6	150	325	11,4	2.82
180/63	70.016.1863.11	180/63 SDR11 ISO S-5	180	63	16,4	139	358	5,8	3.16
180/75	70.016.1875.11	180/75 SDR11 ISO S-5	180	75	16,4	144	362	6,8	3.18
180/125	70.016.1812.11	180/125 SDR11 ISO S-5	180	125	16,4	166	362	11,4	3.36
225/125	70.016.2212.11	225/125 SDR11 ISO S-5	225	125	20,5	178	456	11,4	6.40